

Direct Acting


2W(Large Orifice) Series Solenoid Valve

Direct operated 2/2 Way Solenoid Valve


FEATURE

- Compact and good appearance
- Direct acting diaphragm structure, can work at zero pressure
- Can change to pin type coil

SB116-4 Series Solenoid Valve



SYMBOL




SPECIFICATIONS

Model	Nominal Orifice (mm)	Port Size (G)	Operating Pressure (Bar)	Operating Temp (°C)	Fluid Temp (°C)		Power Consumption		Rated Voltage
							AC (VA)	DC (W)	
2W160-10	16	G3/8	0 ~ 7	-5 ~ +20	Direct Acting	200CST	16	14	ACV150-60Hz 24, 116, 220, 380 DCV112, 24
2W160-15	16	G1/2							
2W200-20	20	G3/4							
2W250-25	25	G1							
2W350-35	35	G1 1/4							
2W400-40	40	G1 1/2							
2W500-50	50	G2							

OVERALL DIMENSIONS :

Model	(G)	A	B	C	D
2W160-10	G3/8	93	56	108	65
2W160-15	G1/2	93	56	108	65
2W200-20	G3/4	100	55	117	72
2W250-25	G1	104	78	125	90
2W250-35	G1 1/4	141	93	172	124
2W400-40	G1 1/2	141	93	172	124
2W500-50	G2	157	124	195	153

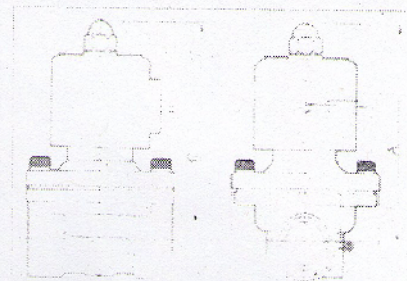

For Steam temperature : -5 - 180 °C


2L Series Solenoid Valve

2L Series two-position two-way Solenoid Valve


FEATURE

- Adopting pointed structure with self-sealing compensation lengthens the service life of the valve
- Solenoid magnetic field design can make this product have higher pressure
- The balance of the piston gap design enhances the reliable application of this valve in high temperature
- Connection can: 1/8" - 2"
- Working pressure: 1-15 Bar
- Seal PTFE

2W Series Solenoid Valve



SYMBOL



SPECIFICATIONS

Model	Nominal Orifice (mm)	Port Size (G)	Operating Pressure (Bar)	Operating Temp (°C)	Fluid Temp (°C)		Power Consumption		Rated Voltage
							AC (VA)	DC (W)	
2L170-10	17	G3/8	1 ~ 15	-20 ~ +55	0 ~ +150	<20CST	16	14	ACV150-60Hz 24, 116, 220, 380 DCV112, 24
2L170-15	17	G1/2							
2L170-20	17	G3/4							
2L200-25	22	G1							
2L300-35	30	G1 1/4							
2L300-40	30	G1 1/2							
2L500-50	50	G2							

OVERALL DIMENSIONS :

Model	(K)	A	B	C	D
2L170-10	G3/8	125	42	146	82
2L170-15	G1/2	125	42	146	82
2L170-20	G3/4	125	42	146	82
2L200-25	G1	136	52	162	90.5
2L300-35	G1 1/4	148	74	183	111
2L300-40	G1 1/2	148	74	183	111
2L500-50	G2	176	94.5	223	163

